

CITY TIPPER

CANTER 616

DUONIC AMT OR MANUAL



GVM:
5,995kg



Power / Torque:
110kW / 370 Nm



Wheelbase:
2,500 mm (B)

- 30,000km service intervals
- Car licence
- Limited slip diff
- Disc brakes

SPECIFICATIONS - 616 CITY TIPPER

MODEL

4x2 616	CITY TIPPER	6 SP.	AMT	FEA61BR3SFAC(T)
4x2 616	CITY TIPPER	5 SP.	MAN	FEA61BR4SFAC(T)

WHEELBASE (mm)

2,500 (B)
2,500 (B)

GVM (kg)

5,995
5,995


GCM (kg)

9,500
9,500

ENGINE

Engine Version	FUSO 4P10-T4 Diesel
Configuration	4 Cyl. In-line DOHC, 4-Valve
Type	Variable Geometry Turbo Charged Air to Air Intercooled
Displacement	3 litre (2998cc)
Power (DIN)	110kW @ 2840~3500rpm
Torque (DIN)	370Nm @ 1350~2840rpm
Maximum Engine Speed (rpm)	4100
Compression Ratio	17.5:1
Cooling System/Oil Cooler	Water cooled, 13.0L capacity. Engine oil cooler
Air Cleaner	Paper Element Type with Restrictor Indicator. Vertical Intake Mounted on Clean Air Side (RH)
Cold Start Preheat	Standard
Emission Control	Diesel Particulate Filter (DPF) Exhaust Dash Display DPF Status 0~9 (Empty~Full) Parked Regeneration possible from 7~9
Emission Level	EURO 5 (ADR 80/03) and EEV rated (Enhanced Environmentally-Friendly Vehicle)

4P10-T4

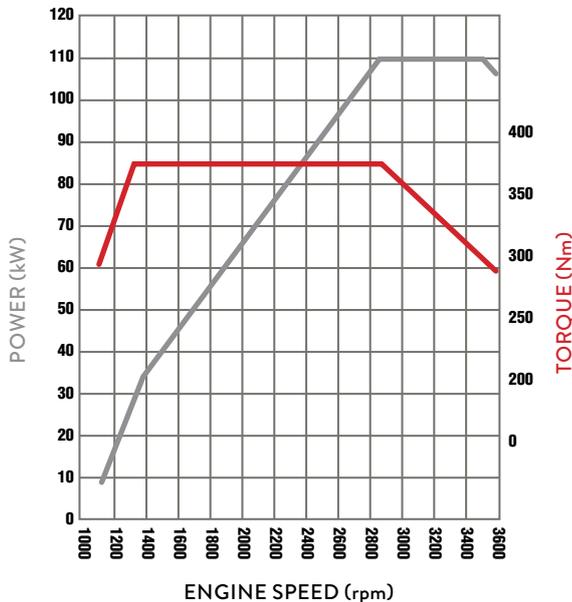

FUEL

Injection System	Bosch Common Rail Direct Injection Bosch Piezo Technology Injectors
Tank Type	Rectangular Steel Tank with Locking Cap
Fuel Capacity (L)	70
Filtration	Filter with Water Separator and Indicator Sensor

ELECTRICAL

Voltage	12V Negative Earth
Alternator Capacity	12V-110 amp
Battery Specification	Heavy Duty 115D31L x 2
Headlamp Type	Halogen 2 x 55W/60W
Fog lamp in bumper	Standard

CLUTCH

	DUONIC AMT	Manual
Clutch Model	DUONIC Automated Manual (no clutch pedal)	FUSO C4W30
Type	Dual Clutch (Wet Multi-plate)	Single Dry Plate, Direct Hydraulic Type, 300mm

TRANSMISSION

	DUONIC AMT	Manual
Version	FUSO DUONIC M038S6	FUSO M038S5
Type/Speeds	6 Speed Automated Manual with Auto and Manual Modes	5 Speed with In-Dash Gearshift Lever
Features	Virtually Instant Gear Changes Synchromesh 2nd-5th In-Dash Gear Lever with Park Brake Position ECO Mode to Minimise Fuel Usage	
Ratios	1st: 5.397 2nd: 3.788 3rd: 2.310 4th: 1.474	5th: 1.000 6th: 0.701 Rev. 5.397
PTO Opening	LH Side Direct with pump	LH Side Direct with pump

FRONT AXLE

Axle	FUSO F200T "I" beam
Design Capacity (kg)	2,600
Max Operating Capacity (kg)	2,570

FRONT SUSPENSION

Type	Multi Leaf with Stabiliser Bar and Double Acting Shock Absorbers
Size (mm)	1,150 x 70

REAR AXLE

Axle	FUSO D03 Full Floating Banjo Type with Positive Locking Limited Slip Differential (LSD).
Ratio	5.285:1
Design Capacity (kg)	4,500
Max Operating Capacity (kg)	4,500

REAR SUSPENSION

Type	Steel Suspension
Details	Multi Leaf with Stabiliser Bar and Double Acting Shock Absorbers
Size Main Leaves (mm)	1,100 x 70

STEERING

Power Assisted	Tilt/Telescopic Adjustable Steering Wheel
----------------	---

SPECIFICATIONS - 616 CITY TIPPER

BRAKES

Type	Hydraulic Dual Circuit with Front and Rear Twin Calliper Discs
Size Front/Rear (mm)	293 x 40
Features	ABS plus EBD (Electronic Brake Distribution) Exhaust Brake Brake Priority System
Park Brake	Transmission Mounted

WHEELS AND TYRES

Wheel Type	7 x Single Piece Disc Rims (Including Spare)
Wheel Size	16.0 x 5.5K-115
Wheel Stud Pattern	5 Stud 208 PCD
Tyre Size Front/Rear	205/85R16 / 205/85R16 Traction
Spare Tyre Carrier	Provided

CHASSIS

Type	Tapered Frame with Box Reinforcement
Size (mm)	190 x 60 x 5
Width (mm)	700

Refer to the bodybuilders guidelines on the Fuso website (www.fuso.co.nz) before mounting a body or modifying the chassis

INSTRUMENTS

Gauges	Speedometer with Odometer Tachometer Fuel Level Water Temperature
Colour Information Display	Fuel Consumption DPF Bar Chart from 1~9 Water Temperature Maintenance Reminder System Date and Time Tripmeters

STANDARD FEATURES

Airbag(s)	Drivers Air Bag and Seat Belt Pre-Tensioner
Hill Start System	Adjustable Engagement on manual transmissions
Speed Limiter	Activated and adjustable by Fuso dealer
Cab Cooling and Heating	Air Conditioner/Heater/Demister
Accessory Power	12V Accessory Power Outlet/Cigar Lighter
Driving	AM/FM CD + USB + AUX + Bluetooth Hands Free Keyless Central Locking Electric Windows LED Map Lamp and Fluorescent Cabin Lamp Cup Holders (2)

STANDARD FEATURES (continued)

Storage	Dual Overhead Storage Pockets In-Dash Centre Document Storage Door Storage Pockets Lockable Glove Box Coat Hooks
Cab: External	Front Step Lights
Chassis	Reverse Warning Buzzer

CAB FEATURES

Type	All Steel Forward Control Manual Tilt
Cab Structure	ECE-R29 European Cab Strength Approved with Door Side Impact Beams
Mounting	Hydroelastic 4 Point
Additional Engine Access	N/A
Colour	Natural White (W31)
Windscreen Wipers	2 Speed + Intermittent Cycle with Integrated Washer Nozzles
Rear Vision Mirrors	1 x Internal 2 x External Convex Heated
Interior	Fully Trimmed cab with vinyl floor covering
Seating Capacity	3
Seat Belts	Driver - Height adjustable ELR 3 Point with tension reducer Outside Passenger - ELR 3 point Centre Passenger - Lap belt
Seat (driver)	Heavy Duty with LH Arm Rest Adjustable Lumbar Support and Weight Adjustment Cloth Trim
Seats (passenger)	Flat Folding 2 Passenger Bench with headrest in outside position

SERVICE INTERVALS

Please contact your nearest Fuso dealer for details

WARRANTY

36 months or 100,000km (whichever occurs sooner)
Subject to terms and conditions in the Fuso Warranty Booklet

PERFORMANCE

	Duonic	Manual
Turning Circle (kerb to kerb - metres)	10.2	10.2
Road Speed (km/h) at Max Engine Speed	120	120
Engine Speed (rpm) at 90km/hr (top gear)	2395	2280
Gradeability at Rated GVM (theoretical)*	51%	50%
Notes	*This is theoretical performance only. Actual performance may vary under different conditions	

KERB WEIGHTS AND MAX AXLE LOADS (kg)

Model		Vehicle Ratings**		Max Axle Loadings**		Kerb Weights*		
		GVM	GCM	Front	Rear	Front	Rear	Total
4x2 616 City Cab Tipper 6 Sp. AMT	FEA61BR3SFAC(T)	5,995	9,500	2,570	4,500	1,480	1,170	2,650
4x2 616 City Cab Tipper 5 Sp. MAN	FEA61BR4SFAC(T)	5,995	9,500	2,570	4,500	1,465	1,165	2,630

* Weights (est.) includes 10L fuel and spare wheel and are subject to 2.5% variation (+/-)

** Vehicle ratings and max axle loadings may be limited by local regulations.

SPECIFICATIONS - 616 CITY TIPPER

DIMENSIONS (mm)


Wheelbase	2,500
Length Overall	4,690
Height Overall	2,125
Width Overall	1,880
Width Rear Axle	1,880
Width Front Track	1,390
Width Rear Track	1,235
Width Frame	700

REAR BODY

Type:	ShinMayawa Tipper Body
Body Capacity (m ³):	2.0

REAR BODY (continued)

Inside Body Dimensions (mm):	
Length x Width x Height	3,050 x 1780 x 370
Floor Height From Ground to Rear Deck Floor	965
Thickness : Floor	3.2
Front and Side Panel	2.3
Tail Panel	3.2
Tipping Mechanism:	Under body-hydraulic cylinder with link mechanism
Tipping Performance: Tip Angle (deg)	55
Lifting Time (sec)	20
Lowering Time (sec)	20

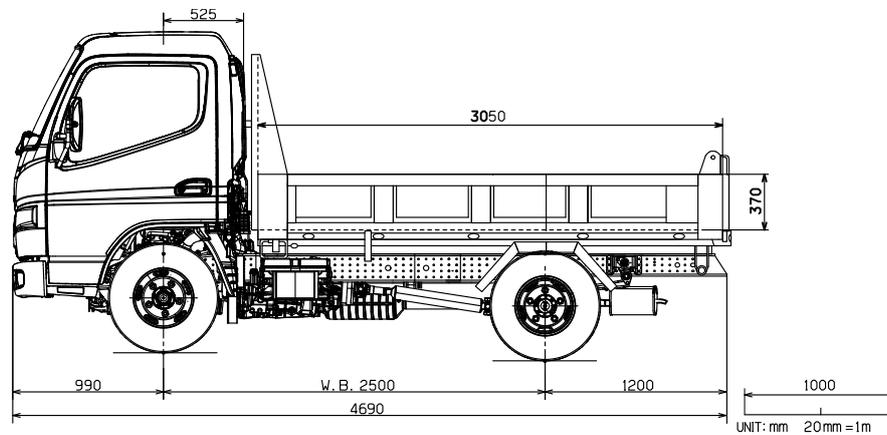

CANTER 616 CITY TIPPER - 'B' WHEELBASE

fuso.co.nz

0800 FUSO NZ

FUSO