




Model code	FJX4WL2RFBA
Configuration	4x2
GVM	16,000kg
GCM	32,500kg
Axle GVM ratings	Front: 6,600kg Rear: 10,000kg
Kerb weight (10L fuel)	Front: 3,860kg Rear: 2,330 kg Total: 6,190kg
Engine	OM906, 6.4L, 6 cylinder
Power/torque	285hp (210kW) @2200rpm / 1120Nm@ 1200-1600rpm
Transmission	9spd G131 manual synchromesh Ratios: 14.57- 9.48 - 6.64 - 4.82 - 3.67 - 2.59 -1.81- 1.32 -1.00 : R - 13.86


Axles	Front: Reverse Elliot (6,600kg) Rear: Full Floating with Diff Lock (10,000kg) Ratio : 4.778 : 1
Suspension	Front: Parabolic with Anti Roll Bar Rear: Semi Elliptic Springs
Brakes	Full Air S Cam with Auto Brake Adjustment & ABS Park Brake: Rear Wheel Spring Actuated Auxiliary: Exhaust Brake and Engine Brake
Tyres	295/80R22.5
Wheels	8.25 x 22.5 10 Stud ISO
Fuel	260L + 60L Ad Blue
Electrical	24Volt / 80Amp Alt
Performance	104km/hr speed limited; Max gradability = 60%

3 Seat Cab	Meets ECE R29 crash standard (max 6,000kg front axle loading) All Steel Forward Control Tilting Day Cab Arctic White (AW1) Air Suspended Driver's Seat with Integral Seat Belt ELR 3 Point with Centre Lap Belt & Driver's Seat Belt Reminder Air Conditioner / Heater / Demister 12V Accessory Power Outlet Radio AM/FM + USB + AUX Central Locking / Electric Windows Dual Door Mirrors + LH Front and Side Safety Mirrors Speedo, Tacho, Air & Fuel Gauges Ad Blue level, Engine Hours, Fuel Consumption, Water Temperature Variable RPM Control Cruise Control
-------------------	---

OM906

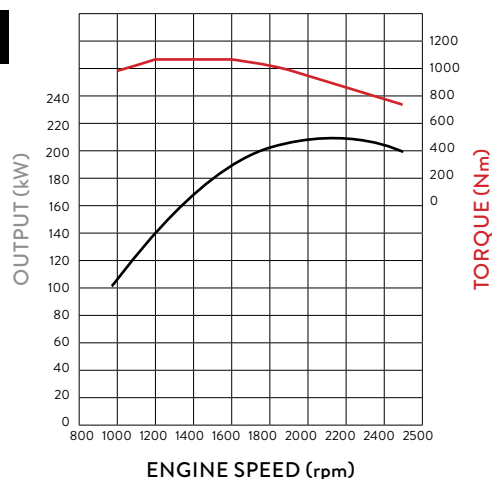

ENDURO FJ1628

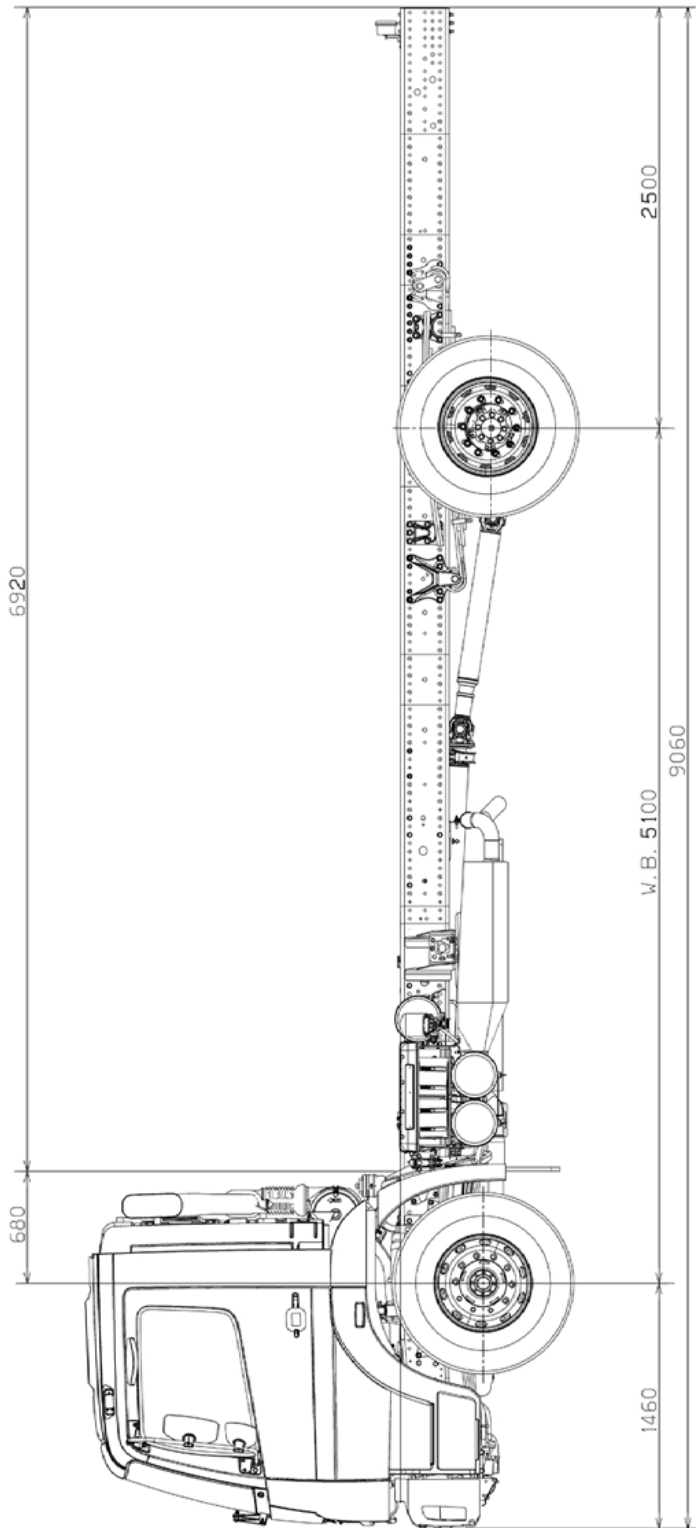

DIMENSIONS

Wheelbase 5,100

Overall Length 9,060

Width 2,490

Height 2,900

Frame Height
At Rear Axle 1,062

Rear Over Hang (ROH) 4,132

Front Track 2,045

Rear Track 1,805

Note: All dimensions are in mm